
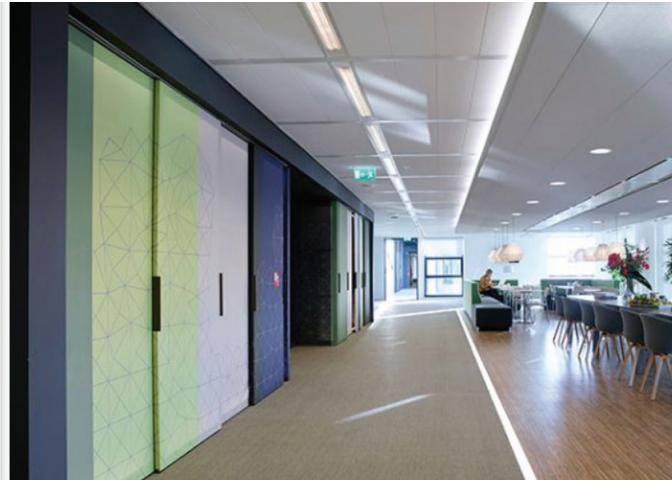




S 9a System S 9a concealed, removable

Dimensions	600 x 600 mm, 610 x 610 mm, 625 x 625 mm Widths: 300 mm, 305 mm, 400 mm Lengths: 1200 mm, 1220 mm, 1250 mm (Other sizes available on request. See OWAlifetime collection price list for minimum quantities and surcharges)
Edges	Long edge: 4 Short edge: 10
Tile thickness	Approx. 20 mm (OWAcoustic premium)
Fire behaviour	A2-s1,d0 as per EN 13501-1
Resistance to fire	See leaflet no. 9500 eu e or no. 9500 e uk
Metal system	All metal components are galvanized or white coated. For further details and colours see the OWAlifetime collection price list
Minimum suspension depth	Suspended installation approx. 165 mm when using hanger no. 09/10, no. 09/5 and no. 76 (depending on the existing ceiling slab) Direct installation approx. 65 mm + timber batten